
Chinatown Fountain Streambed Repair Project 34W Lincoln Street

Boston, MA 02111

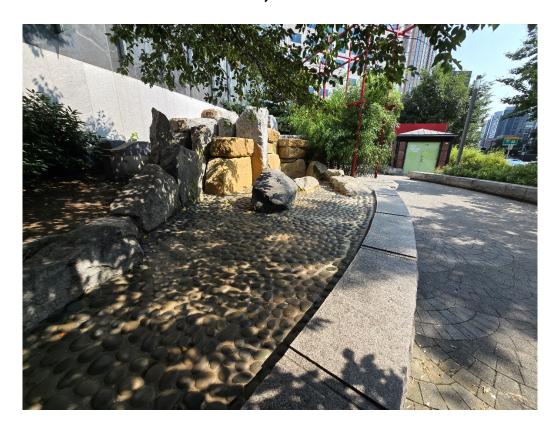

ADDENDUM 01

• Keynote #7 on Sheet A1.0 should read as the following: "NEW PMMA WATERPROOFING SYSTEM TO BE INSTALLED ON EXISTING CONCRETE RIVERBED STRUCTURE, CONCRETE CORE STRUCTURE AT WATERFALL, AND EXISTING WATERFALL WELLS. HORIZONTAL SURFACES TO RECIEVE TYPICAL PMMA SYSTEM; VERTICAL SURFACES TO RECIEVE PPMA FLASHING SYSTEM. NEW REGLETS TO BECUT INTO EXISTING CONCRETE AND GRANITE CURBS FOR TERMINATION OF NEW WATERPROOFING. COORDINATE WITH ARCHITECT PRIOR TO PERFORMING WORK ON REGLETS. NEW WATERPROOFING SYSTEM TO TERMINATE APPROXIMATELY 1/4" BELOW NEW MORTAR/RIVER STONE SETTING BED. WATERSTOPS TO BE INSTALLED WHERE INDICATED. REMOVE EXISTING GROUT AT JOINTS BETWEEN EXISTING GRANITE CURBS. INSTALL NEW GROUT TO FULL DEPTH AT JOINTS BETWEEN EXISTING GRANITE CURBS.

Page 1 of 1